



**Michigan  
Technological  
University**

**Michigan Technological University  
Digital Commons @ Michigan Tech**

---

Michigan Tech Patents

Vice President for Research Office

---

3-4-2014

# Rotational torque measurement device

Paul A. LaVigne

Daniel R. Kemppainen

Glen L. Barna

Follow this and additional works at: <https://digitalcommons.mtu.edu/patents>



Part of the [Automotive Engineering Commons](#)

---

## Recommended Citation

LaVigne, Paul A.; Kemppainen, Daniel R.; and Barna, Glen L., "Rotational torque measurement device" (2014). *Michigan Tech Patents*. 127.

<https://digitalcommons.mtu.edu/patents/127>

Follow this and additional works at: <https://digitalcommons.mtu.edu/patents>



Part of the [Automotive Engineering Commons](#)

(12) **United States Patent**  
**LaVigne et al.**

(10) **Patent No.:** **US 8,666,682 B2**  
(45) **Date of Patent:** **Mar. 4, 2014**

(54) **ROTATIONAL TORQUE MEASUREMENT DEVICE**

(75) Inventors: **Paul A. LaVigne**, Hancock, MI (US);  
**Daniel R. Kemppainen**, Calumet, MI (US);  
**Glen L. Barna**, Houghton, MI (US)

(73) Assignee: **Michigan Technological University**,  
Houghton, MI (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 373 days.

(21) Appl. No.: **12/837,253**

(22) Filed: **Jul. 15, 2010**

(65) **Prior Publication Data**

US 2011/0015878 A1 Jan. 20, 2011  
**Related U.S. Application Data**

(60) Provisional application No. 61/225,834, filed on Jul. 15, 2009.

(51) **Int. Cl.**  
**G01L 1/00** (2006.01)

(52) **U.S. Cl.**  
USPC ..... **702/41**

(58) **Field of Classification Search**  
USPC ..... 702/41-44, 57, 183, 189, 193; 73/1.09,  
73/64.49, 131, 650, 862.08, 862.194,  
73/862.195, 862.321, 862.334

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,067,354 A \* 11/1991 Kawai ..... 73/862.328  
5,734,108 A \* 3/1998 Walker et al. .... 73/650  
6,817,528 B2 \* 11/2004 Chen ..... 235/462.13

\* cited by examiner


*Primary Examiner* — Mohamed Charioui



(74) *Attorney, Agent, or Firm* — Michael Best & Friedrich LLP


(57) **ABSTRACT**

A device for measuring torque applied through a rotating member. A first torsion reference member is fixedly coupled to the rotating member at a first axial position and a second torsion reference member is fixedly coupled to the rotating member at a second axial position. A first detector detects the passage of the first torsion reference member past the first detector upon each full rotation of the rotating member and to generate a first signal upon each passage of the first torsion reference member. A second detector detects the passage of the second torsion reference member past the second detector upon each full rotation of the rotating member and to generate a second signal upon each passage of the second torsion reference member. A controller calculates a phase difference between the first signal and the second signal relative during rotation of the rotating member under a torsional load.


**10 Claims, 7 Drawing Sheets**

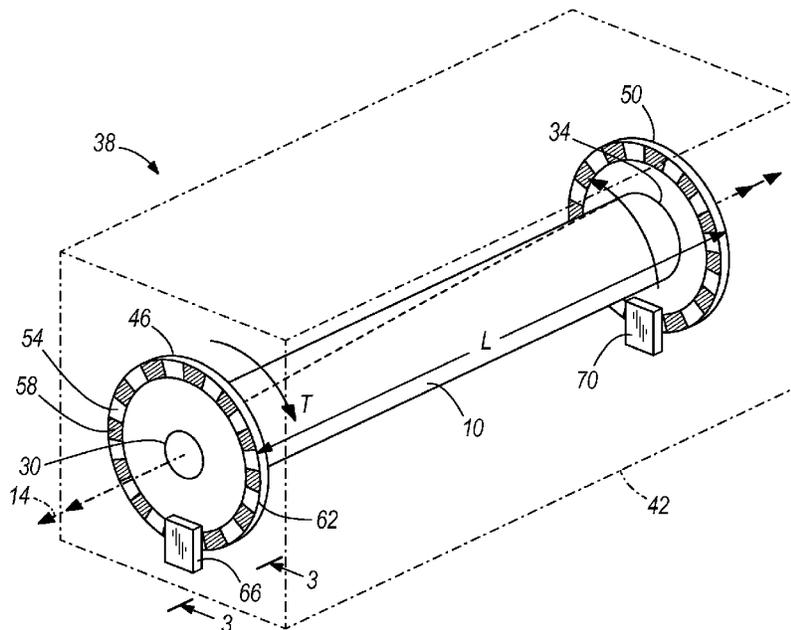

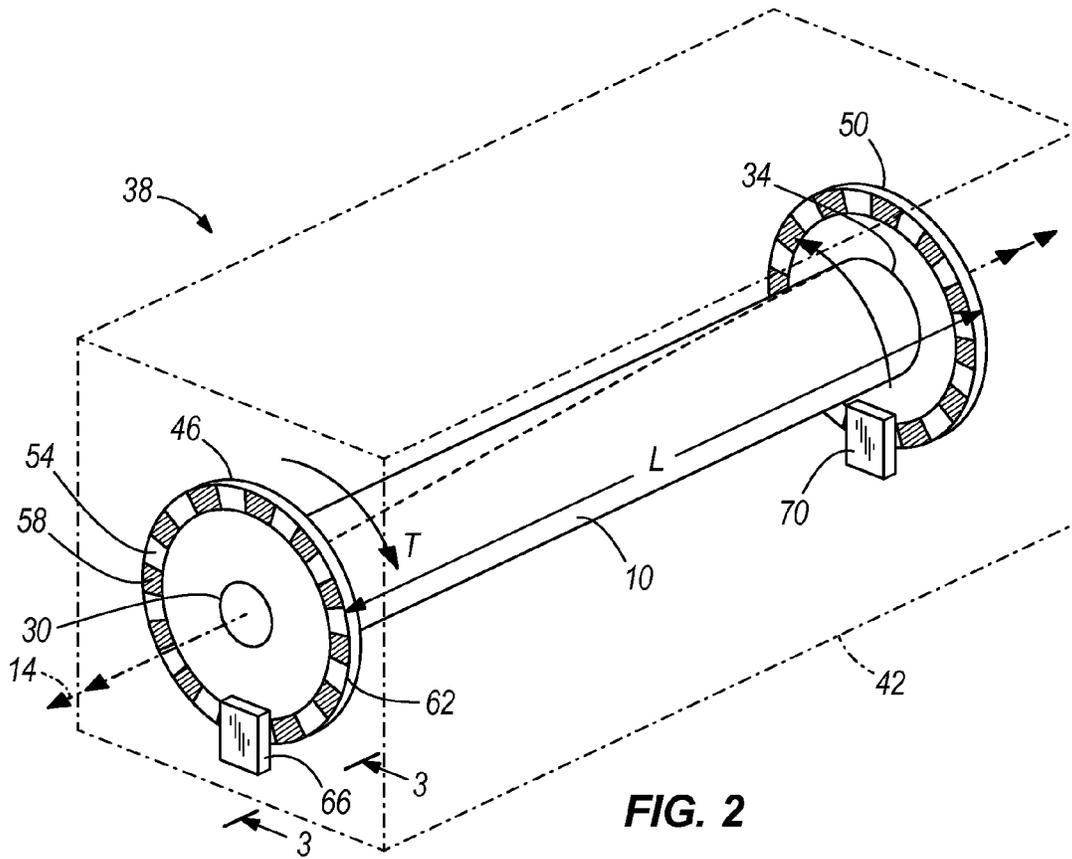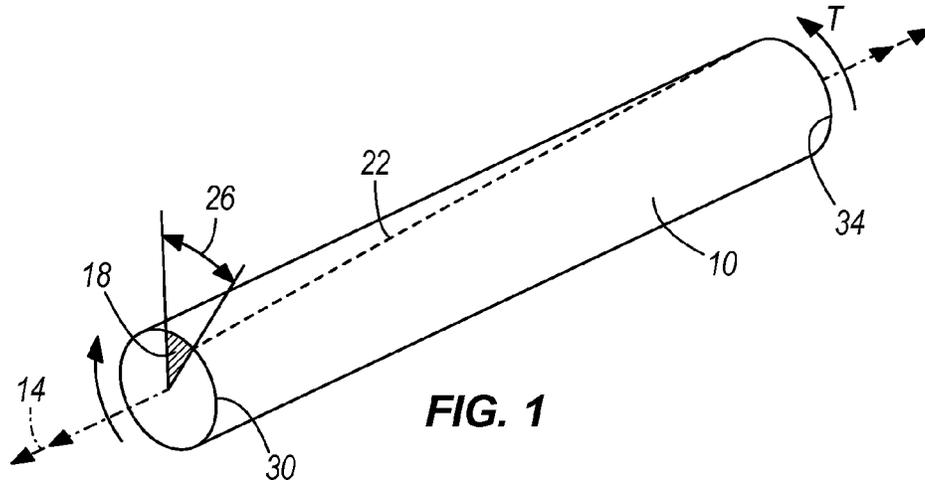

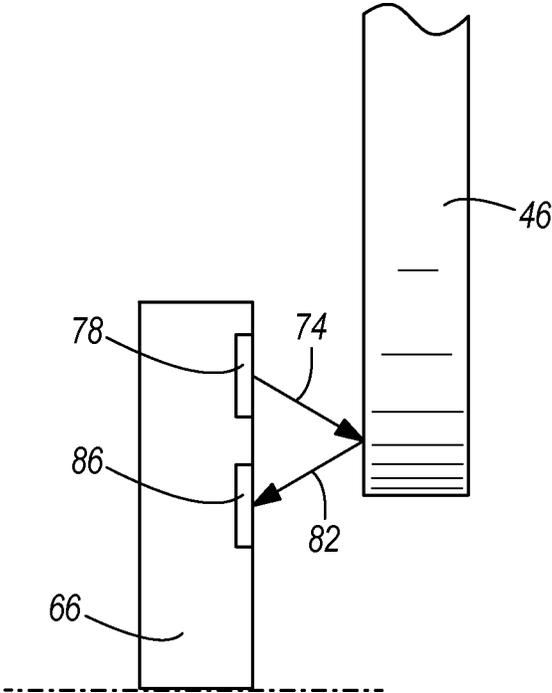

**FIG. 3**

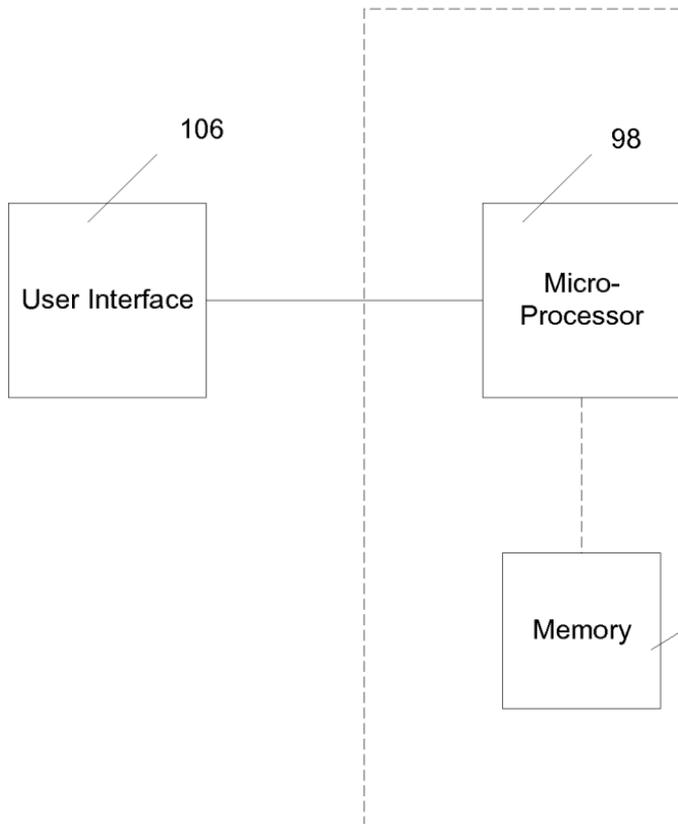

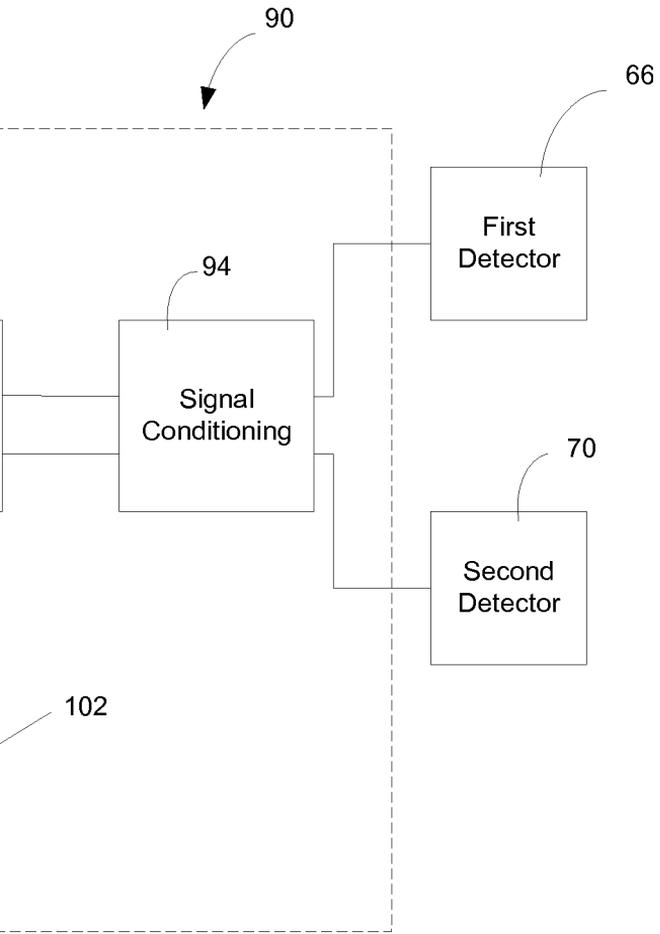


FIG. 4

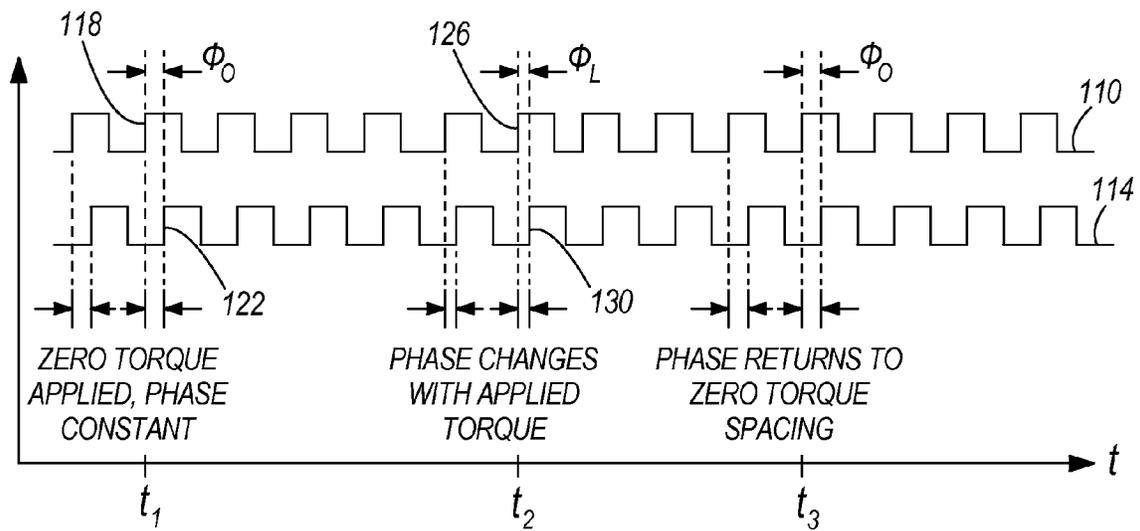
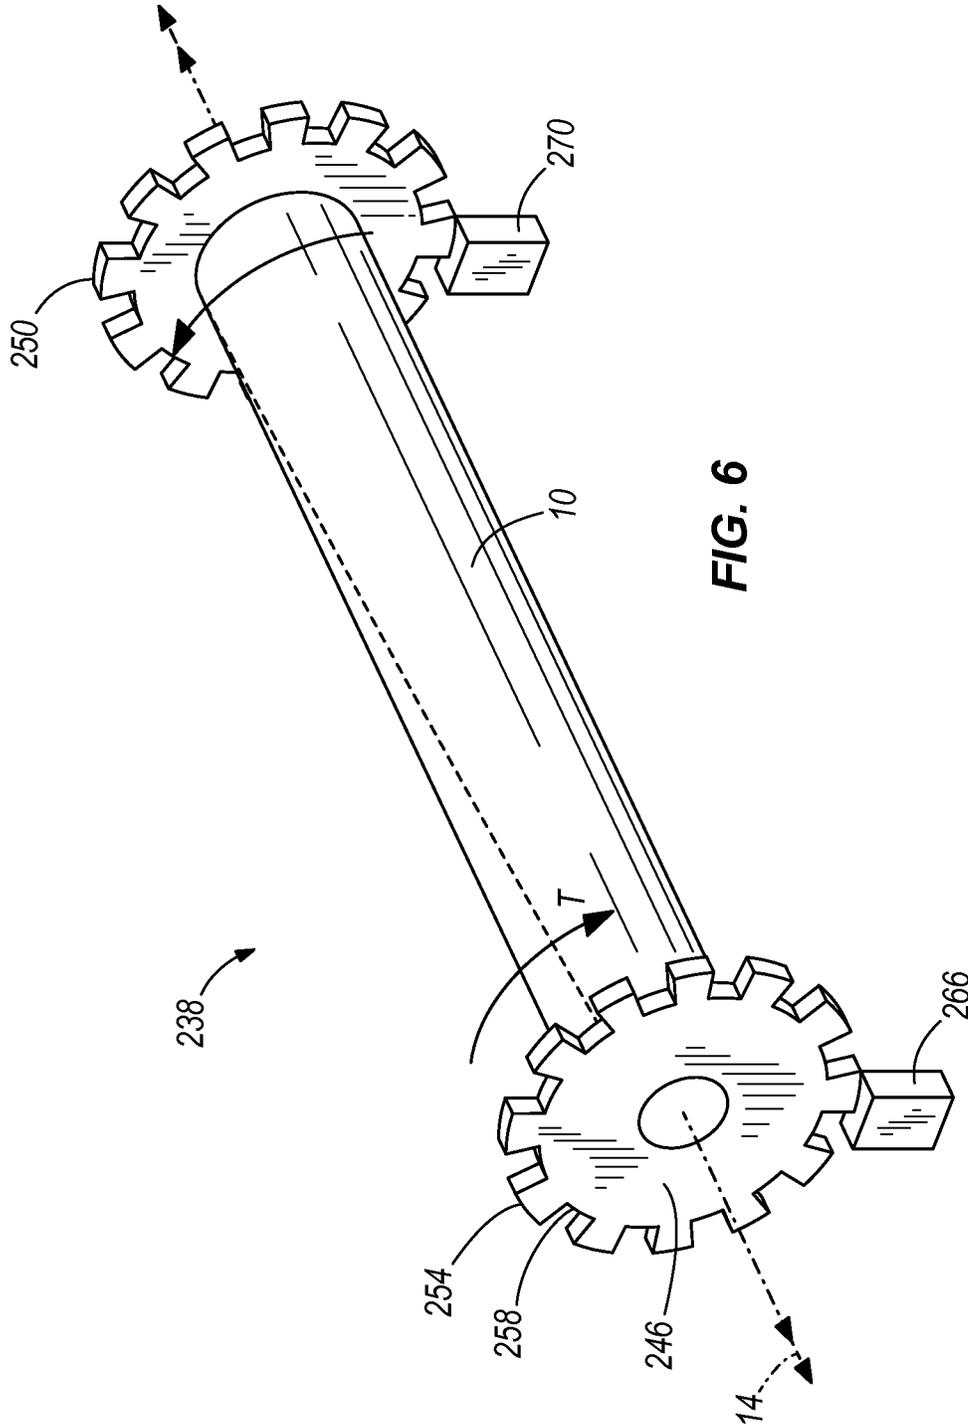


FIG. 5



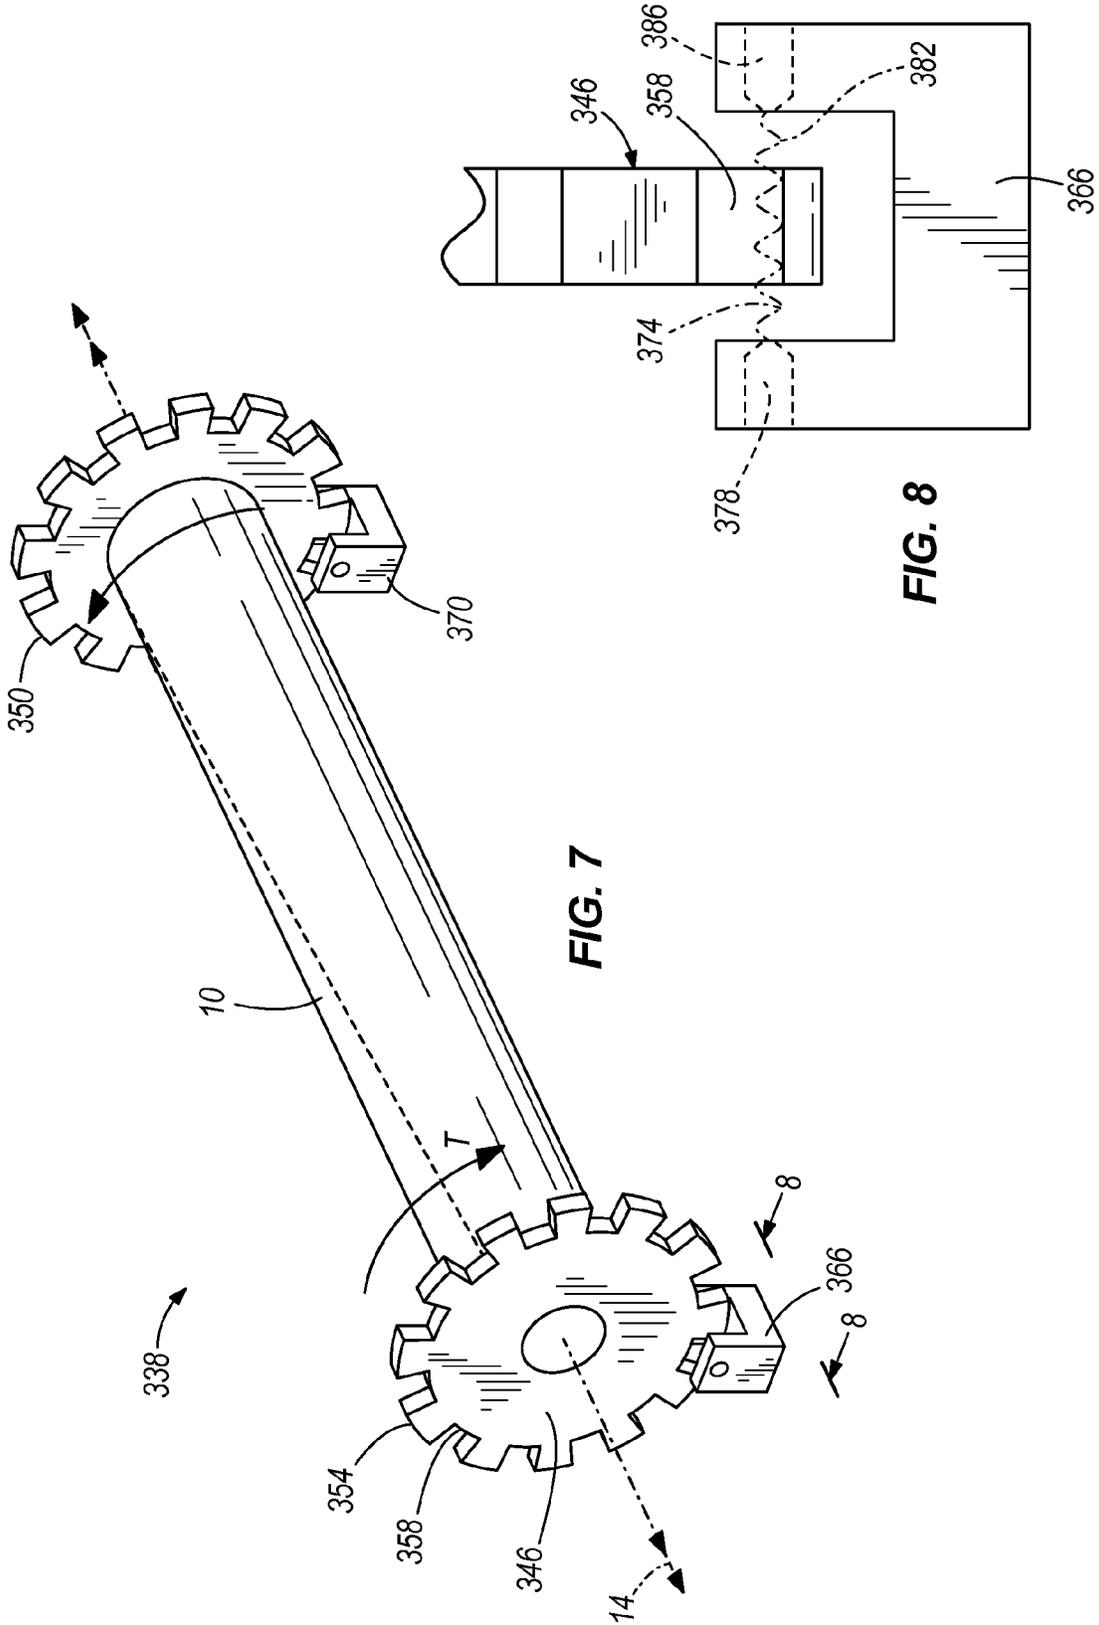
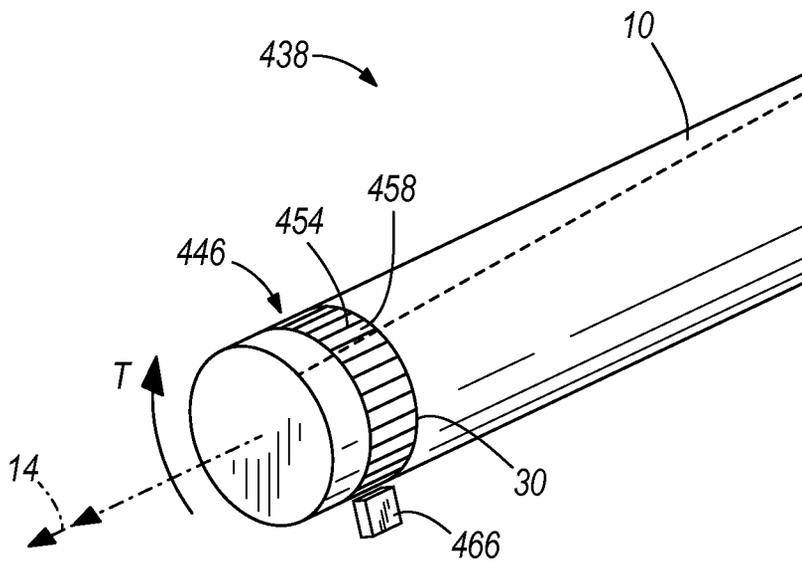


FIG. 7

FIG. 8



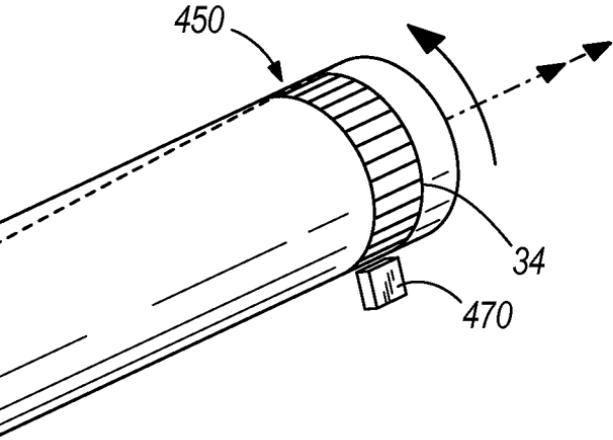


FIG. 9

1

## ROTATIONAL TORQUE MEASUREMENT DEVICE

This application claims priority to U.S. Provisional Patent Application No. 61/225,834, filed on Jul. 15, 2009, the entire content of which is incorporated herein by reference.

### BACKGROUND

The present invention relates to a torque measurement device, and more particularly to a rotational torque measurement device with a reference member and detector.

Torque measurement devices typically utilize a torque transducer or sensor, which convert an applied torque into an electrical signal. A strain gauge is a torque transducer that converts applied torque into a change in electrical resistance. Typically, a strain gauge is attached to a deformable member, a torque is applied, and a change in electrical resistance is measured as the member deforms. The change in electrical resistance is converted into a torque measurement. Inertia of rotating components can cause measurement error. Additionally, due to their wires, such strain gauges are not applicable to rotating members.

### SUMMARY

In one embodiment, the invention provides a device for measuring the torque applied through a rotating member rotating about a longitudinal axis, relative to a fixed member. The device includes a first torsion reference member fixedly coupled to the rotating member at a first axial position and a second torsion reference member fixedly coupled to the rotating member at a second axial position. A first detector is coupled to the fixed member and configured to detect the passage of the first torsion reference member past the first detector upon each full rotation of the rotating member and to generate a first signal upon each passage of the first torsion reference member. A second detector is coupled to the fixed member and configured to detect the passage of the second torsion reference member past the second detector upon each full rotation of the rotating member and to generate a second signal upon each passage of the second torsion reference member. A controller is configured to calculate a phase difference between the first signal and the second signal relative to a time reference during rotation of the rotating member under a torsional load. The controller compares the phase difference to a reference value and calculates a torque loading on the rotating member resulting from the torsional load based on the phase difference.

In another embodiment the invention provides a method of measuring torque applied through a rotating member rotating about a longitudinal axis relative to a fixed member. The method includes applying a torsional load to the rotating member. Rotation of the rotating member is detected at a first axial position and a first signal is generated. Rotation of the rotating member is detected at a second axial position and a second signal is generated. A loaded phase difference is calculated between the first signal and the second signal and compared to a reference value. A torque applied to the rotating member is calculated based at least upon the magnitude of loaded phase difference relative to the reference phase difference.

In yet another embodiment, the invention provides a system for calculating a torque load on a shaft. The system includes a first sensor generating a first signal in response to rotation of the first portion of the shaft and a second sensor generating a second signal in response to rotation of the

2

second portion of the shaft. A processor compares the first signal to the second signal to arrive at a loaded phase difference between the first and second signals while the shaft is rotating under a load. The loaded phase difference is compared to a baseline phase difference. A twist in the shaft between the first and second portions of the shaft is calculated based on a difference between the loaded phase difference and the baseline phase difference.

Other aspects of the invention will become apparent by consideration of the detailed description and accompanying drawings.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a shaft with an applied torque.

FIG. 2 is a perspective view of shaft with a torque measuring device according to one aspect of the invention.

FIG. 3 is a side view of a first torsion reference member and a first detector of the torque measuring device of FIG. 2.

FIG. 4 is a block diagram of a controller of the torque measurement device of FIG. 2.

FIG. 5 is a graph comparing a signal generated by the first detector to a signal generated by the second detector of the torque measuring device of FIG. 2.

FIG. 6 is a perspective view of a shaft with a torque measuring device according to another aspect of the invention.

FIG. 7 is a perspective view of a shaft with a torque measuring device according to yet another aspect of the invention.

FIG. 8 is a side view of a first torsion reference member and a first detector of the torque measuring device of FIG. 7.

FIG. 9 is a perspective view of a shaft with a torque measuring device according to still yet another aspect of the invention.

### DETAILED DESCRIPTION

Before any embodiments of the invention are explained in detail, it is to be understood that the invention is not limited in its application to the details of construction and the arrangement of components set forth in the following description or illustrated in the following drawings. The invention is capable of other embodiments and of being practiced or of being carried out in various ways.

FIG. 1 is a perspective view of a shaft 10. The shaft 10 has a torque T applied about an axis 14, resulting in torsion illustrated generally at 18. Torsion is the twisting of an object due to an applied torque. As indicated by the reference line 22, the torsion 18 can be measured as an angular deformation 26 between a first axial position 30 (in this case, a first end) and a second axial position 34 (in this case, a second end). For a shaft of known mechanical characteristics, a magnitude of the applied torque can be calculated, derived or correlated by determining a change in torsion from a baseline or known value. As used herein, the torque T is not limited to numerical values expressed in the usual units of Newton-meters or foot-lbs, but may also express a comparative value from which the actual torque may be determined.

FIG. 2 is a perspective view of the shaft 10 with a torque measurement device 38 according to one aspect of the invention. The shaft 10 is illustrated as being disposed within a fixed member 42. The shaft 10 may be a rotor, turbine shaft, drive shaft, power take off or other rotating member. The fixed member 42 may be, for example, a motor, engine, or transmission housing. The fixed member 42 may also be a radial or thrust bearing, or any other member fixed relative to a rotating

member. The shaft **10** is rotatably supported by the fixed member **42** about the axis **14**, for rotation with respect to the fixed member **42**.

A first torsion reference member **46** is fixedly coupled to the shaft **10**, for rotation with the shaft, at the first axial position **30**. A second torsion reference member **50** is fixedly coupled to the shaft **10**, for rotation with the shaft, at the second axial position **34**. Although the torsion reference members **46** and **50** are illustrated as being located at first and second ends of the shaft, respectively, the torsion reference members can be placed anywhere along the shaft so long as a distance **L** between the reference members is known. In the embodiment of FIG. **1**, each of the first torsion reference member **46** and the second torsion reference member **50** is a circular disk, though in other embodiments they may be triangular, square, star, or other polygonal shapes. The reference members **46** and **50** are oriented perpendicular to the axis **14**, concentric with the axis. In the embodiment of FIG. **2**, each reference member **46** and **50** includes a pattern of alternating light reflective areas **54** and light absorbing areas **58** arranged in a ring **62** concentric about the axis **14**.

A first detector (i.e., sensor) **66** is coupled to the fixed member **42** adjacent the first reference member **46**. A second detector **70** is coupled to the fixed member **42** adjacent the second reference member **50**. The detectors **66** and **70** in the embodiment of FIG. **2** are optical and substantially identical. In other embodiments, the first detector and the second detector may differ in form or function. As shown in FIG. **3**, the detector **66** emits an emitted light **74** from an emitter portion **78** against the reference member **46**. The detector **66** receives reflected light **82** reflected off the reference member **46** at a receiver portion **86**.

Each detector **66** and **70** receives reflected light **82** when a light reflective area **54** passes in front of the detector and does not receive reflected light when a light absorbing area **58** passes in front of the detector. In this regard, it is not important in the broader scope of the invention that the areas between the light reflective area **54** be light absorbing per se. In other embodiments, the light absorbing area **58** may be replaced with an area that is light reflecting, but is angled such that the reflected light **82** does not reach the receiver portion **86**, and achieve the same purpose as the light absorbing area **58**. In other embodiments, the light absorbing area **58** could be reflective, but light scattering (e.g., a many faceted surface) and achieve the same purpose as the light absorbing area **58**. In some embodiments, the emitted and reflected light may be in the visible spectrum. In other embodiments, the light may be ultraviolet, infrared, or other ranges of the electromagnetic spectrum. The emitter portion may also be a laser. Similarly, the reflective areas and absorbing areas may be optimized for specific wavelengths of a corresponding detector.

Each detector **66** and **70** produces a signal with a first amplitude in response to receiving light at the receiver portion **86**, and a second amplitude in response to receiving no light or light of insufficient intensity or brightness at the receiver portion **86**. In some embodiments, the first amplitude may be "on" and the second amplitude may be "off," such that the detectors each generate a binary on-off signal in response to the alternating sequence of the pattern when the rotating member rotates. However, in other embodiments the signals could be sinusoidal, sawtooth, or have other waveforms. The first detector **66** generates a first signal, and the second detector **70** generates a second signal.

As illustrated in FIG. **4**, signals from the first detector **66** and second detector **70** are received by a controller **90**. In the illustrated embodiment, the detectors **66** and **70** are hardwired to the controller **90**. In other embodiments, the first signal

and/or second signal may be transmitted wirelessly to the controller. The signals received by the controller **90** may first be processed by a signal conditioning circuit **94** configured to filter or otherwise condition the raw signals from the detectors **66** and **70**. After signal conditioning, the first signal and second signal are received by a micro-processor **98**. The micro-processor **98** is configured to analyze the signals and determining the torque **T**. A memory module **102** is provided to store data, such as constants or baseline values which may be used by the micro-processor **98** as part of determining the applied torque **T**. The controller **90** may also receive inputs from and send outputs to additional sensors user inputs, or other user interfaces, indicated generally at **106**. Examples of a user interface include a keyboard and display by which an operator may enter data related to the mechanical characteristics of the shaft.

FIG. **5** is a graph comparing a representative first signal **110** and a representative second signal **114**. In the illustrated embodiment, each of the first signal **110** and the second signal **114** is binary (i.e., "on" or "off"), with a square wave form. However, in other embodiments the signals could be sinusoidal, sawtooth, or have other waveforms that may require signal conditioning. It is the phase of the signals, rather than the amplitude or waveform, that is used to derive torsion and/or torque. Because the first signal **110** and second signal **114** relate to the same shaft, under steady-state conditions, and assuming that both reference members **46**, **50** and detectors **66**, **70** are identical, both signals will have the same frequency.

At any given time, the first signal **110** has a first phase, and the second signal **114** has a second phase. Comparing the first phase to the second phase with respect to the same time reference **t** results in a phase difference  $\Phi$ . A phase difference  $\Phi$  may be expressed in terms of time or in terms of degrees.

When the rotating member rotates at steady state under known load, such as at time  $t_1$ , a baseline phase difference  $\Phi_0$  between the first signal **110** and second signal **114** is constant. The baseline phase difference  $\Phi_0$  may be a programmed constant value or an input determined by direct observation. Where the first reference member and second reference member have identical orientations relative to the shaft under a no load condition (i.e., zero torsion), the baseline phase difference  $\Phi_0$  at  $t_1$  will be zero. Regardless of how or when the baseline phase difference  $\Phi_0$  is determined, it is later used by the controller as a comparative value for determining the applied torque **T**. Thus, any baseline value may be used, so long as the conditions under which it occurs are known. The baseline value is stored in memory **102**.

When the applied torque **T** is applied to the rotating member (e.g., with a dynamometer or a prime mover) at a time  $t_2$ , the phase difference changes from  $\Phi_0$  to a loaded phase difference  $\Phi_L$ . Based on additional inputs including the mechanical characteristics of the rotating member, the applied torque **T** can be calculated by comparing the loaded phase difference  $\Phi_L$  to the baseline phase difference  $\Phi_0$ . The comparison may be expressed either as a difference or a ratio:

$$\Phi_0 - \Phi_L = \text{change in phase difference} = \Delta\Phi$$

$$\Phi_0 / \Phi_L = \text{phase difference ratio}$$

Either value may be used calculate the applied torque **T** since both the change in the phase difference or phase difference ratio relates to a change in torsion of the shaft. For a shaft of known mechanical characteristics, the applied torque **T** may be directly calculated from the torsion by well known mechanical principles. Measurement error is minimized since actual deformation, not including inertia affects, causes

the change in phase difference. A speed of shaft rotation can be input from the motor that is rotating the shaft, or can be calculated based on a period of the first signal **110** or second signal **114**.

The following example illustrates one method by which the controller **90** may calculate an applied torque  $T$  for a shaft rotating at a known instantaneous rotational velocity measured in revolutions per minute (RPM). The amount of time for each rotational degree to pass is calculated as follows:

- 1) Convert RPM to revolutions per second ("RPS")

$$(RPM/60)=RPS$$

- 2) Convert to degrees per second by multiplying by 360:

$$((RPM/60)*360)=\text{Degrees per Second}$$

- 3) Convert to seconds per degree:

$$(1/((RPM/60)*360))=\text{Seconds per Degree}$$

The baseline phase difference  $\Phi_0$  is obtained by measurement or calculation. This baseline phase difference  $\Phi_0$  may be measured, starting at  $t_1$ , by obtaining a time from an edge **118** of the first signal **110** to a corresponding edge **122** of the second signal **114**, if rotational velocity (RPM) is known. This baseline phase difference  $\Phi_0$  may also be calculated by recording RPM, independent of rotational velocity, as a phase shift in degrees. The phase shift value can then be used to calculate a baseline phase difference  $\Phi_0$  expressed in time using the known RPM of the shaft. Those of skill in the art will appreciate that shaft RPM can be determined by the controller **90** from either the first signal **110** or the second signal **114**.

Next, the loaded phase difference  $\Phi_L$  with the unknown applied torque  $T$  is measured starting at time  $t_2$ . In this example, the loaded phase difference  $\Phi_L$  is expressed in time rather than degrees. In this example,  $\Phi_L$  is the time between an edge **126** of the first signal **110** to a corresponding edge **130** of the second signal **114**.

Once  $\Phi_L$  and  $\Phi_0$  are determined, the change in the phase difference is calculated:

$$\Phi_0 - \Phi_L = \Delta\Phi$$

Dividing the change in the phase difference  $\Delta\Phi$  by seconds per degree provides the change in degrees of torsion due to the applied torque:

$$\Delta\Phi / (\text{Seconds per Degree}) = \text{Degrees of Torsion}$$

For a shaft of known mechanical characteristics, the degrees of torsion may be used to calculate, correlate, or derive the applied torque  $T$  applied to the shaft.

FIGS. **6-9** illustrate additional aspects of the invention embodied in alternative embodiments. Each of the embodiments of the invention disclosed herein shares the common principle of deriving a torque loading from the phase difference between a first signal generated by a first detector and a second signal generated by a second detector. Similar components have been given similar reference numerals, with different prefixes to distinguish the different embodiments.

FIG. **6** illustrates a second embodiment of a torque measurement device **238**, in which a first reference member **246** and a second reference member **250** each take the form of notched or castellated disks. Solid protrusions, or teeth **254**, of the reference members **246** and **250** protrude outwardly radially. The teeth **254** are separated by radial gaps **258**. Each tooth **254** has a magnetic or electromagnetic characteristic distinguishable from the radial gaps **258**. Each of a first detector **266** and a second detector **270** in this embodiment includes an electromagnetic sensor, such as an inductive element, or Hall effect sensor (not shown).

A Hall effect sensor is a transducer that varies its output voltage in response to changes in magnetic field. The Hall effect sensor may be combined with circuitry that allows the device **238** to act in a binary (on/off) mode. In this embodiment, signals generated by the first detector **266** and second detector **270** are similar to those illustrated in FIG. **5**, and the controller **90** illustrated in FIG. **4** is applicable to the embodiment of FIG. **6**. Where the signals are binary, the "on" signal is established when a tooth **254** passes by the detector **266** or **277**, and the "off" signal is established when a gap **258** passes by the detector **266** or **277**. This works due to a voltage difference that is created across the detector, transverse to an electric current in the detector and a magnetic field perpendicular to the detector. Polarization is reversed when a tooth **254** passes by the detector causing the magnetic field to reverse. The starting polarization is restored when a gap **258** passes by.

FIGS. **7-8** illustrate a third embodiment of a torque measurement device **338** in which a first reference member **346** and a second reference member **350** take the form of notched or castellated disks. As with the embodiment of FIG. **6**, solid portions, or teeth **354**, of the disks protrude outwardly radially. The teeth are separated by radial gaps **358**, or "windows."

As illustrated in FIG. **8**, each detector **366** (or **370**) in this embodiment is an optical, line-of-sight detector. A light emitter **378** is positioned on one side of the reference member **346** and a light receiver **386** is positioned on the opposite side of the reference member. In this embodiment, an "on" signal is established when light **374** transmitted by the light emitter **378** passes through a gap **358** and is received at **382** by the light receiver **386**. An "off" signal is established when the light **382** is interrupted by a tooth **354**.

FIG. **9** illustrates a fourth embodiment of a torque measurement device **438**. In this embodiment, a first reference array **446** and a second reference array **450** are substantially flush with the surface of the shaft **10**. The reference arrays **446** and **450** are arranged circumferentially on the shaft **10** at the first axial position **30** and the second axial position **34**, respectively. The reference arrays **446** and **450** include contrasting reference features **454** and **458**. Examples of the contrasting reference features include grooves, ridges, permanent magnets, alternating light reflective and non-reflective areas or other features. It should be appreciated that while multiple reference features are illustrated for each reference member, some embodiments may only have one reference feature per reference member.

The embodiment of FIG. **9** includes a first detector **466** and a second detector configured **470** to detect passage of the reference feature(s) during rotating of the shaft **10**. Where the reference feature has a magnetic characteristic, the corresponding first and second detectors **466** and **470** may include Hall effect sensors. Where the reference feature has optical characteristics, such as light reflective and light absorbing areas, the corresponding detectors **466** and **470** may include a light detector and light emitter, as described in the embodiment of FIGS. **2-3**.

The invention is not limited to the embodiments illustrated and described above, and is capable of being embodied in any system that includes a reference member and a detector configured to detect passage of the reference member in order to generate a signal. In all illustrated embodiments, the reference members and detectors are configured to generate a signal that corresponds to a pattern of a changing condition such as light or a magnetic field. In the optical embodiments, the detectors include a receiver and the reference members include portions that change the amount of light (e.g., permit or prevent light, or change the intensity or amount of light)

that is received by the light receiver. In the magnetic embodiments, the reference members vary a magnetic field at the detectors.

Thus, the invention provides, among other things, a device and method for measuring torque in rotating machinery. Various features and advantages of the invention are set forth in the following claims.

What is claimed is:

1. A device for measuring the torque applied through a rotating member rotating about a longitudinal axis relative to a fixed member, the device comprising:

- a first torsion reference member fixedly coupled to the rotating member at a first axial position;
- a second torsion reference member fixedly coupled to the rotating member at a second axial position;
- a first detector coupled to the fixed member and configured to detect the passage of the first torsion reference member past the first detector upon each full rotation of the rotating member and to generate a first signal upon each passage of the first torsion reference member;
- a second detector coupled to the fixed member and configured to detect the passage of the second torsion reference member past the second detector upon each full rotation of the rotating member and to generate a second signal upon each passage of the second torsion reference member; and

a controller configured to:

- calculate a phase difference between the first signal and the second signal relative to a time reference during rotation of the rotating member under a torsional load;
- compare the phase difference to a reference value; and
- calculate a torque loading on the rotating member resulting from the torsional load based on the phase difference,

wherein the controller is configured to calculate the torque loading based upon a ratio of the phase difference and the reference value.

2. The device of claim 1, wherein the first torsion reference member includes a pattern that is sensed by the first detector; and wherein the pattern comprises gaps and protrusions.

3. The device of claim 1, wherein the first torsion reference member includes a pattern of reflective and non-reflective portions; and wherein the first detector comprises a light emitting portion and a light receiving portion for sensing the pattern of reflective and non-reflective portions.

4. The device of claim 1, wherein the first torsion reference member is integrally formed as one with the rotating member.

5. The device of claim 1, wherein the first torsion reference member comprises areas of a first texture and areas of a second texture on a surface of the rotating member; and wherein the first detector is configured to receive a light reflected off of the first texture.

6. The device of claim 1, wherein the first torsion reference member comprises a radial pattern of protrusions; and wherein the first detector senses the radial pattern.

7. The device of claim 1, wherein the reference value is a reference phase difference calculated under a known torsional load.

8. The device of claim 1, wherein the reference value is a reference phase difference calculated under a no-load condition.

9. The device of claim 1, wherein the reference value is a constant.

10. The device of claim 1, wherein the controller is configured to calculate the torque loading based upon a difference between the phase difference and the reference value.

\* \* \* \* \*